

CAM-1101A-L

WIRELESS CAMERA WITH LINE SUPPORT



Package Content

- ① CAM-1101A-L
- ② User Manual x 1
- ③ 12V1A Power Adapter


Friendtrol Technologies, Inc

FEATURES

- Support Wifi 2.4GHz 802.11 b/g/n
- Support 2.4G Wi-Fi connecting to cloud
- Setting temperature or humidity to trigger LINE notification
- Support motion detection via camera to trigger LINE notification
- Support time-lapse photography
- Support up to 3 sets of LINE token
- Support up to 5 sets of LINE notification
- Integrate with other DI/O device via RS-485
- Flexible set up the time period to take photos
- Easy to install the device and complete the software setup

SEPCIFICATION I/O INTERFACE

Wireless	1 x Wireless Module WiFi 802.11 b/g/n (2.4G) Up to 150Mbps
RS-485 Serial Port	1 x 2pins-phoenix terminal block For RS-485 only
Camera Module	1 x Optic Camera Resolution: 1280x960 pixels at 30fps White Balance: Auto Gain: Auto FOV: 120°

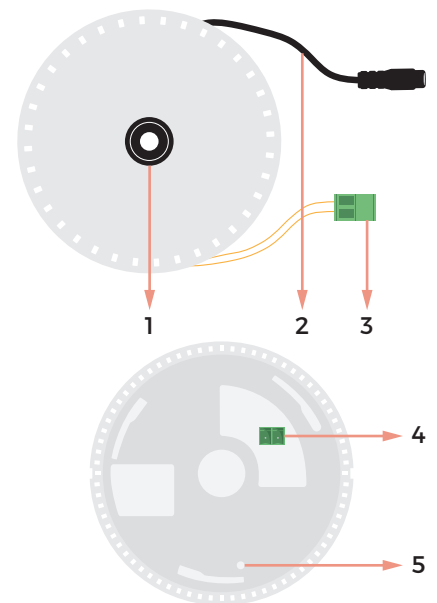

- 1) Optical Len
Camera module
- 2) Power Input
Connect to power supply
- 3) RS-485 Serial Port
Connect to other deviceswith RS-485
- 4) Power Input
Connect to power supply (phoenix connector)
- 5) Button
to reset the system

OTHERS

Power Supply	9-12V DC
Power Consumption	Up to 5W
Operating Temperature	-20°C to 75°C (4°F to 167°F)
Storage Temperature	-40°C to 85°C (-40°F to 185°F)
Enclosure	Plastic
Fixedness	Mounting ear with screws
Device Dimension (WxDxH)	110x110x25 mm (4.3"x4.3"x1")