

SEN-1101L

WIRELESS LIGHT SENSOR WITH LINE SUPPORT



Package Content

- ① SEN-1101L x 1 ② User Manual x 1


Friendtrol Technologies, Inc

FEATURES

- Support Wifi 2.4GHz 802.11 b/g/n
- Enable to work with DIM1 (dimmer) to adjust the brightness of lamps or lighting products
- Detecting range : 0Lux - 65535Lux
- Accuracy rate :
 - ±3% rdg ±0.5%f.s. (<10,000Lux)
 - ±4% rdg ±10dgts. (>10,000Lux)
- Number of renewal : 2~4 times per second

SEPCIFICATION I/O INTERFACE

Wireless	1 x Wireless Module WiFi 802.11 b/g/n (2.4G) Up to 150Mbps
RS-485 Series Port	1 x 2pins-phenix terminal block For RS-485 only
Digital Sensor	1 x Digital Luminance Sensor Light intensity: 0-65535Lux Tolerance: ±3% rdg ±0.5%f.s. (<10,000Lux) ±4% rdg ±10dgts. (>10,000Lux)

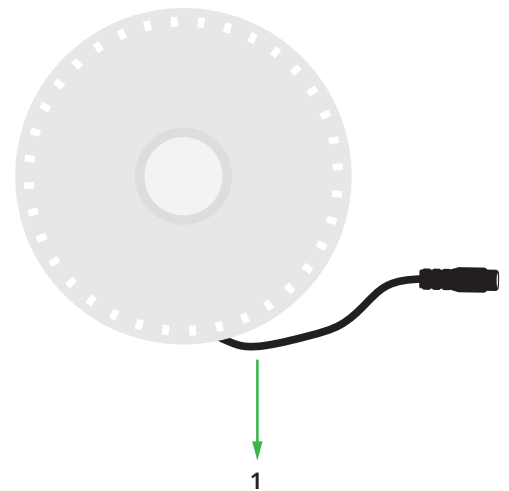

1) Power Input
Connect to power supply

OTHERS

Power Supply	9-24V DC
Power Consumption	Up to 5W
Operating Temperature	-20°C to 75°C (4°F to 167°F)
Storage Temperature	-40°C to 85°C (-40°F to 185°F)
Enclosure	Plastic
Fixedness	Mounting Ear with Screws
Detection Angle	110°
Detection Range	4 - 6m (13.1- 19.7ft)
Device Dimension (WxDxH)	100x 110x 25mm (4.3"x 4.3"x 1")